


elebia®

smart lifting solutions



NEO20 Lifting Hook

The NEO20 lifting hook has been designed as a solution for lifting and transporting bell furnaces, as well as for oversized lifting points (up to 100mm Ø) such as rods between plates, holes on a plate, chain slings, lifting bails and other oversized lifting points.

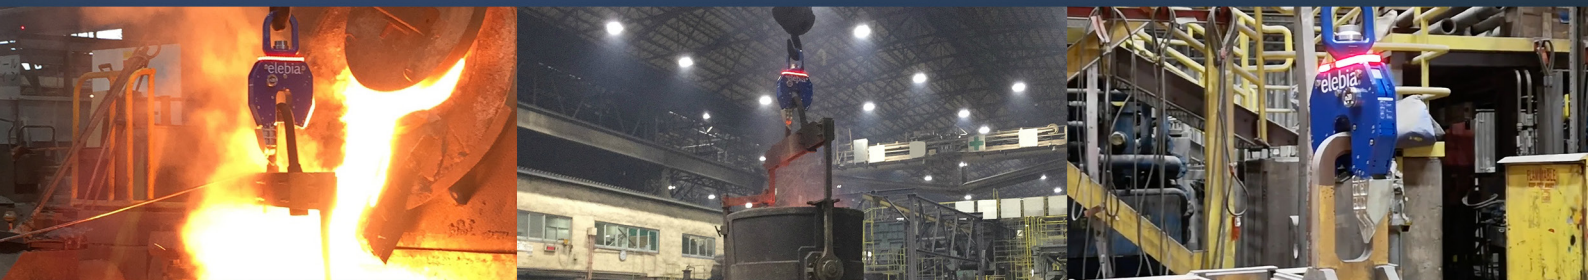



For more information visit us at www.elebia.com

Stevedore, windpower, steel mills, mining, aeronautics, nuclear, construction... No matter what your industry is
elebia will boost the safety and productivity of your cranes.

elebia autohooks s.l.u · Tel. (+34) 93 543 4706 · www.elebia.com · info@elebia.com

Main Features of the NEO20 Lifting Hook

WORKING LOAD LIMIT 20,000 kgs. / 44,093 lbs.

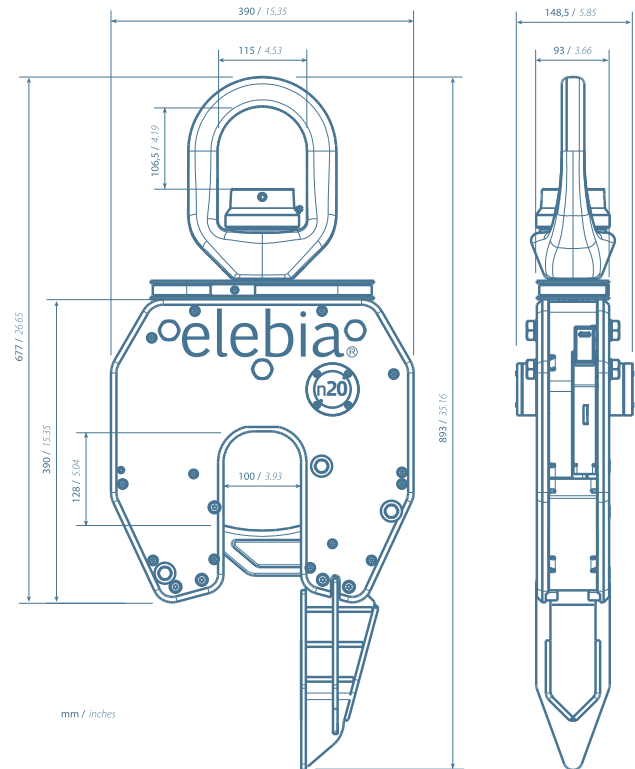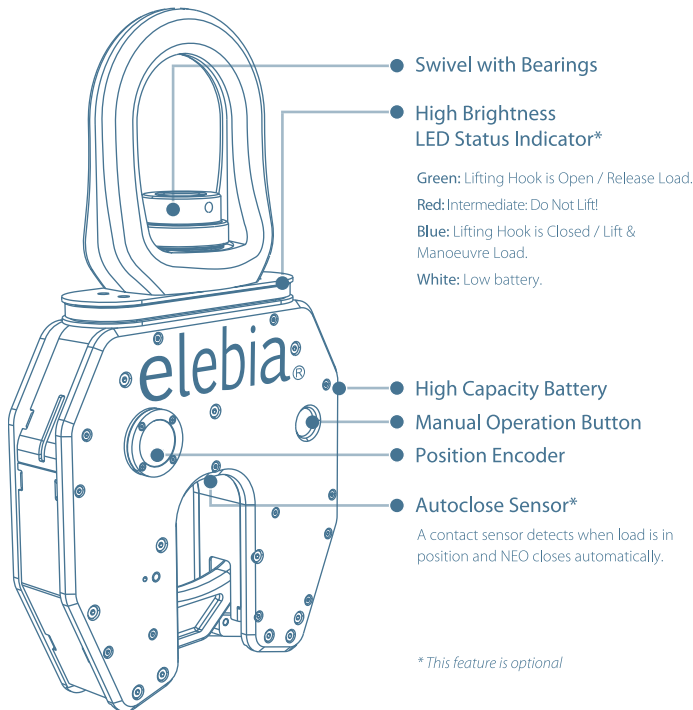

Remote Control




Battery - High capacity: 3 hour charge – 5,000 cycles / 250 hours in standby mode

Mode button: opens the lifting hook


Display Information

elebia button: closes the lifting hook



Charge Indicator

Technology	Rechargeable Li-Ion
Maximum Voltage	12.4 V DC
Nominal Voltage	10.95 V DC
Nominal Capacity	3.2 Ah DC
Protection Circuit	Charge, Discharge, Overvoltage
Maximum Discharge Current	6.4 A
Heat Protection	Thermal 70 °C / 158 °F
Charge Indicator	Eink 14 Segment Display
Temperature (Charge)	0 °C to 45 °C / 32 °F to 113 °F
Temperature (Discharge)	-20 °C to 50 °C / -4 °F to 122 °F
Temperature (Idle)	-20 °C to 60 °C / -4 °F to 140 °F
Weight	150 g / 5.29 oz




Power Supply	3V lithium battery (CR2032)
Available Code Combinations	65,536 different combinations
Detection of Errors in Transmission	2 CRC bytes + Forward Error Correction
Buttons	2
Frequency Selection	1
Frequencies	868 MHz / 924.1 MHz
Communication	Bi-directional return of receiver battery status
Radiated Power	under 5dBm
Antenna	Printed circuit
Range	100 metres / 330 feet
Consumption at Rest	
/ Transmission Operation	5 uA / 20 mA
Working Temperature	-20 °C to 85 °C / -4 °F to 185 °F
Dimensions	Minitel box (68 x 52 x 17 mm / 2.68 x 2.05 x 0.67 inches)

220V Charger

Specifications

Input Voltage	100-240 V AC / 50-60Hz. 1.0A (max.)
Output	12.6 V DC / 1.2 A
Charge Indicator	No
Charge Complete Indicator	No



Regulatory Standards

- EN 10204 3.1.B	- UNE-EN 13135:2013	- Directive on Machine Safety (D2006/42/EC)
- ETSI EN 300 220-1 V3.1.1	- UNE-EN 60204-1:2007	- EMC Directive (2014/30/EU)
- ETSI EN 300 220-2 V3.1.1	- UNE-EN 60730-1:2013	- Low Voltage Directive (2014/35/EU)
- ETSI EN 303 446-1 V1.1.0	- UNE-EN 61000-6-4:2007	- Radio Equipment Directive (2014/53/EU)
- ETSI EN 303 446-2 V1.1.0	- UNE-EN 61000-6-2:2006	- Assurance of Production Quality in accordance with ISO9001.
- UNE-EN 1050	- UNE-EN ISO12100:2012	- ARIB Construction Design Certification Number 203-JN0689.
		- FCC Identifier 2ACLEHO for Equipment Class: Digital Transmission System.

