

FIXED PULLEYS WITH SUPPORT PLATES

PF



- Fixed pulleys with support plates for wire rope \varnothing 4 to 24 mm.


▷ Blocking system to avoid the wire rope to go out of the system.



Technical characteristics

References	PF								
	4	5	6/7	8/9	12/13	15/16	17/18	20	22/24
A mm	80	100	150	200	295	375	425	510	570
B mm	87	108	161	215	312.5	394.5	452.5	543	610
C mm	72	90	135	160	200	240	270	330	370
\varnothing E mm	70	85	133	172	250	320	355	440	500
\varnothing V mm	6,5	8,5	11,5	14	18	20	26	32	32
F mm	51	63	95	115	140	170	190	230	260
G mm	59	73	110	155	235	300	340	410	460
Wire rope \varnothing mm	4	5	6/7	8/9	12/13	15/16	17/18	20	22/24
Maxi cable force at 90°, kg	500	850	1 400	2 300	5 700	7 800	10 300	13 000	16 000
Maxi cable force at 180°, kg	350	600	1 000	1 600	4 000	5 500	7 300	9 200	11 500
Sheave outer \varnothing mm	80	100	150	200	297	375	425	510	570
Weight kg	1	1.5	5	11	29	54.6	88.4	151.7	265

Dimensions

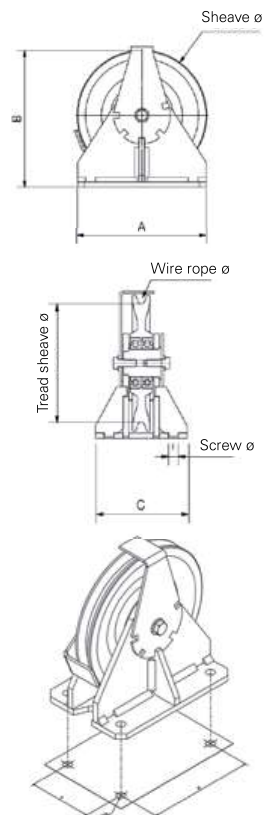

ARTICULATED PULLEYS WITH SUPPORT PLATES

PA



- Articulated pulleys with support plates for wire rope \varnothing 6 to 15 mm.

▷ Blocking system to avoid the wire rope to go out of the system.

Technical characteristics

References	PA			
	6/7	8/9	12/13	15/16
A mm	198	247	348	434
B mm	224	281.5	397.5	492.5
C mm	125	150	200	240
\varnothing E mm	133	172	250	320
\varnothing V mm	12	14	18	23
F mm	95	115	140	170
G mm	110	155	235	300
Wire rope \varnothing mm	6/7	8/9	12/13	15/16
Maxi cable force at 90°, kg	1 400	2 300	5 700	7 800
Maxi cable force at 180°, kg	1 000	1 600	4 000	5 500
Sheave outer \varnothing mm	150	200	297	375
Weight kg	6.8	13.2	34.1	62.7

Dimensions

