

Trench shield grab model TCP

Capacity 1500 - 5500 kg

The TCP grab is suitable for vertical positioning and transportation of trench shields.

Once the grab is set onto the trench shield, a spring-loaded bolt locks itself into the hole of the shield.

Releasing the bolt is done with the 15 m pull cord attached to the grab.




Technical data model TCP

Model	EAN-No. 4025092*	Capacity kg	Weight kg
TCP 1.5	*555807	1500	12.2
TCP 3.0	*555791	3000	19.5
TCP 5.5	*555784	5500	26.7

Dimensions model TCP

Model	TCP 1.5	TCP 3.0	TCP 5.5
A, mm	207	226	269
B, mm	488	517	575
C, mm	218	218	218
D, mm	90	100	120
E, mm	18	24	24
Ø F, mm	20	24	30
G, mm	180	180	180
Ø H, mm	50	63	89

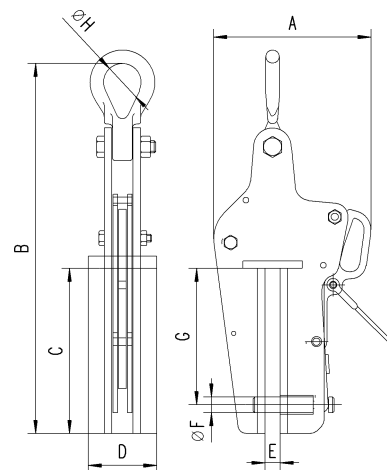

Model TCP