

Standards: British Standard BS EN 13157:2004 + A1:2009.

Proof Tested: 1.5 x WLL.

Safety factor: 4:1.


Temperature range: -20°C to +120°C.

Track width range: 70mm - 305mm. Trolleys available with standard (range 1) or extended (range 2) trolley bars to fit a range of beam widths.

End stops: Fitted as standard.

Anti-tilt: Fitted as an optional extra.

Attachment: Hanging plate fitted into chain hoist.

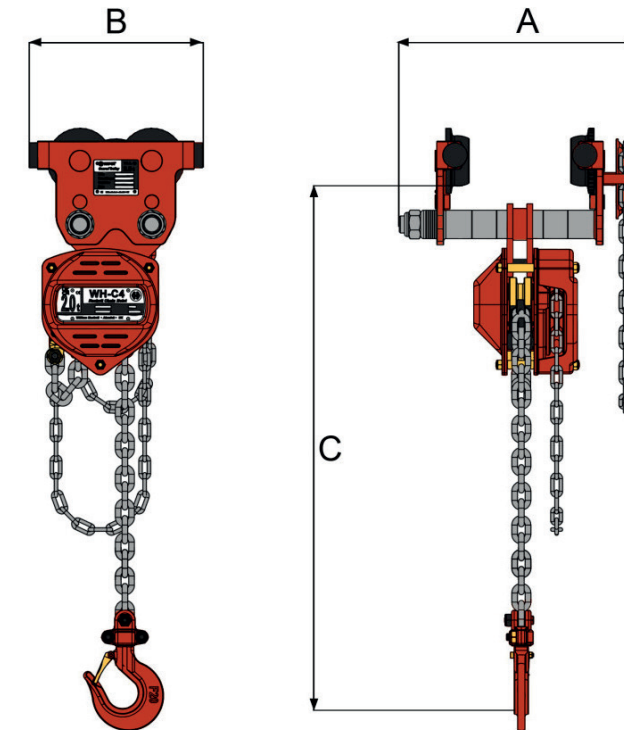

WH C4 Combined Chain Hoist and Push Trolley Metric Specifications

PART CODE	WLL tonnes	NO. OF FALLS	BEAM RANGE 1 mm	BEAM RANGE 2 mm	A mm	B mm	C mm	MASS kg
066.050	0.50	1	70 - 203	-	294	199	295	14.7
066.100	1.00	1	88 - 203	88 - 305	309	221	340	20.1
066.200	2.00	1	88 - 203	88 - 305	327	288	437	31.4
066.320	3.20	2	100 - 203	100 - 305	351	334	493	49.4
066.500	5.00	2	114 - 203	114 - 305	366	407	573	76.7
066.1000	10.00	4	124 - 203	124 - 305	392	525	892	137.4

WH C4 Combined Chain Hoist and Geared Trolley Metric Specifications

PART CODE	WLL tonnes	NO. OF FALLS	BEAM RANGE 1 mm	BEAM RANGE 2 mm	A mm	B mm	C mm	MASS kg
067.050	0.50	1	70 - 203	-	322	199	295	15.4
067.100	1.00	1	88 - 203	88 - 305	326	221	340	20.9
067.200	2.00	1	88 - 203	88 - 305	346	288	437	32.5
067.320	3.20	2	100 - 203	100 - 305	365	334	493	50.6
067.500	5.00	2	114 - 203	114 - 305	381	407	573	78.0
067.1000	10.00	4	124 - 203	124 - 305	403	525	892	139.4

Standards: British Standard BS EN 13157:2004 + A1:2009.

Proof Tested: 1.5 x WLL.

Safety factor: 4:1.


Temperature range: -20°C to +120°C.

Track width range: 2.8 inches to 12.0 inches. Trolleys available with standard (range 1) or extended (range 2) trolley bars to fit a range of beam widths.

End stops: Fitted as standard.

Anti-tilt: Fitted as an optional extra.

Attachment: Hanging plate fitted into chain hoist.

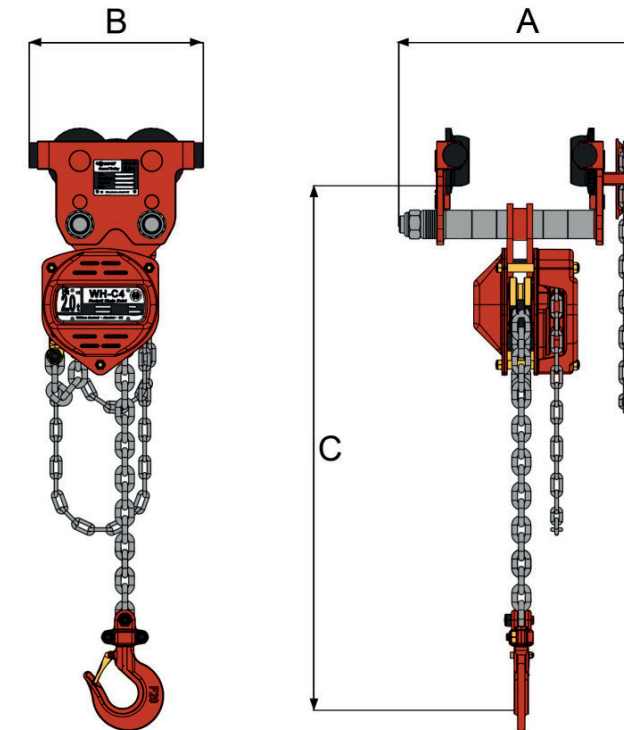

WH C4 Combined Chain Hoist and Push Trolley Imperial Specifications

PART CODE	WLL tons	NO. OF FALLS	BEAM RANGE 1 inch	BEAM RANGE 2 inch	A inch	B inch	C inch	MASS lbs
066.050	0.50	1	2.8 - 8.0	-	11.6	7.8	11.6	32.3
066.100	1.00	1	3.5 - 8.0	3.5 - 12.0	12.2	8.7	13.4	44.2
066.200	2.00	1	3.5 - 8.0	3.5 - 12.0	12.9	11.1	17.2	69.1
066.320	3.20	2	4.0 - 8.0	4.0 - 12.0	13.8	13.2	19.4	108.7
066.500	5.00	2	4.5 - 8.0	4.5 - 12.0	14.4	16.0	22.6	168.7
066.1000	10.00	4	5.0 - 8.0	5.0 - 12.0	15.4	20.7	35.1	302.3

WH C4 Combined Chain Hoist and Geared Trolley Imperial Specifications

PART CODE	WLL tons	NO. OF FALLS	BEAM RANGE 1 inch	BEAM RANGE 2 inch	A inch	B inch	C inch	MASS lbs
067.050	0.50	1	2.8 - 8.0	-	12.2	7.8	11.6	33.9
067.100	1.00	1	3.5 - 8.0	3.5 - 12.0	12.8	8.7	13.4	46.0
067.200	2.00	1	3.5 - 8.0	3.5 - 12.0	13.6	11.1	17.2	71.5
067.320	3.20	2	4.0 - 8.0	4.0 - 12.0	14.4	13.2	19.4	111.3
067.500	5.00	2	4.5 - 8.0	4.5 - 12.0	15.0	16.0	22.6	171.6
067.1000	10.00	4	5.0 - 8.0	5.0 - 12.0	15.9	17.0	35.1	306.7