




Fixed pulleys with support plates, PF17/18




Technical properties

Technical characteristics of Fixed pulleys with support plates, PF17/18

References	PF17/18
External Ø mm	425
Max. capacity (kg) at 180°	7300
Max. capacity (kg) at 90°	10300
Wire-rope Ø in mm	17 to 18
Weight kg	88,4

Dimensions

References	PF17/18
A mm	425
B mm	452,5
C mm	270
Ø E mm	355
Screw Ø mm	26
F mm	190
G mm	340

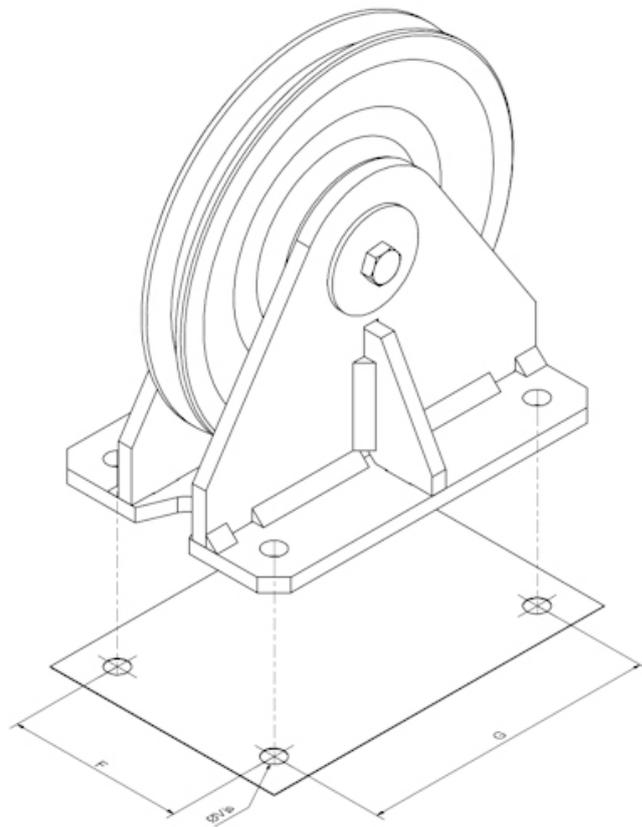

Technical characteristics of the other models of the range

References	PF4	PF5	PF6/7	PF8/9	PF12/13
External Ø mm	80	100	150	200	297
Max. capacity (kg) at 180°	350	600	1000	1600	4000
Max. capacity (kg) at 90°	500	850	1400	2300	5700
Wire-rope Ø in mm	4	5	6 to 7	8 to 9	12 to 13
Weight kg	1	1,5	5	11	29

References	PF15/16	PF17/18	PF20	PF22/24
External Ø mm	375	425	510	570
Max. capacity (kg) at 180°	5500	7300	9200	11500
Max. capacity (kg) at 90°	7800	10300	13000	16000
Wire-rope Ø in mm	15 to 16	17 to 18	20	22 to 24
Weight kg	54,6	88,4	151,7	265



HUCHEZ
 9, Grande Rue
 60420 FERRIERES – France
 ☎ +33 (0) 3 44 51 11 33
 Site internet : www.huchez.com
 E-mail : contact@huchez.fr



SERVICE
 CLIENTS



Pour en savoir plus, n'hésitez pas à nous contacter !
To know more, please contact us!