


# Trolleys | Push & geared / Articulated

## Features:

- Capacities 500-25.000 Kg
- Developed for extreme small curved beams
- Suspension of all types of hoists
- Excellent characteristics due to special slewing points and guidance wheels
- Articulated trolley always designed for one specific fixed beam type
- Standard surface treatment, 2 layer Alkyd paint 80 µm, RAL 7021
- Trolley wheels with life time lubricated bearings
- Wheel break supports and anti-tilt device integrated

## Optional:

- Special constructional design to suit specific hoist type
- Rubber buffers on trolley
- Stainless steel name plates
- Load test, with certificate
- Non corrosive treatments, special surface protection for aggressive environments, outdoor applications, offshore & marine environments. Reference to page 42 of this catalogue for detailed application information

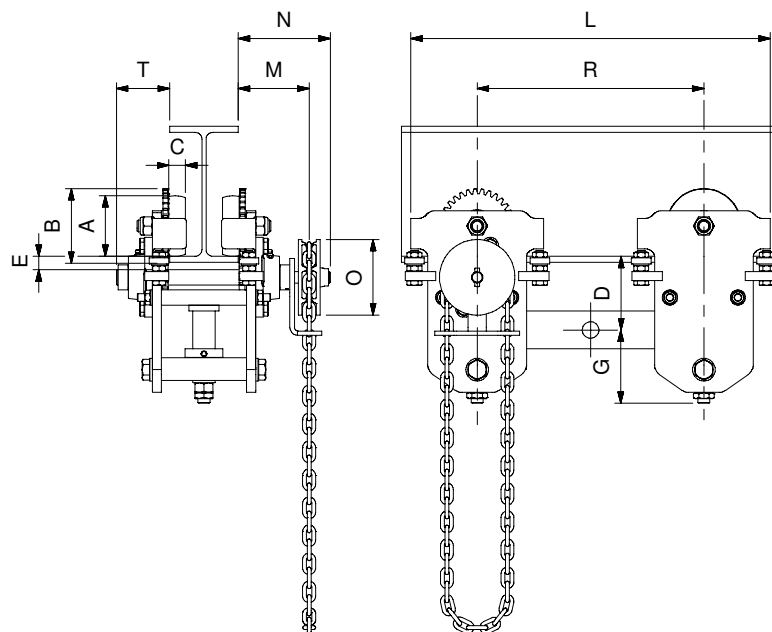

## Technical information:

- 1) Max. INP profile restriction for 11KN = INP300, 22KN = INP360, 33 KN = INP400, 52/64 KN = INP450.
- 2) Extreme small beamwidth-combination with Radius, please contact us or your local agent.

Trolleys / Push & Geared / Articulated (Art. group 83300)																								
Capacity	Hoist Mass Max.	Chassis Type	Beam width fixed	R (min). Radius Beam 2)	Dimensions													Chain Pull Max.	Push 83300 Art. Nr.	Push	Geared 83300 Art. Nr.	Geared excl. Handchain	Galvanized Handchain Control length	Stainless Handchain Control length
					A	B	C	D	E	G	L	R	M	N	O	T								
Kg.	Kg.		mm.	mm.												Kg.		Price €		Price €	Price / m €	Price / m €		
500	100	11 KN	fixed	400	60	75	18	148	18	59	455	300	70	95	100	63	10	--01101		--01111				
1.000	120	11 KN	fixed	400	60	75	18	145	18	64	455	300	70	95	100	63	10	--01102		--01112				
2.000	250	22 KN	fixed	450	80	100	22	152	20	73	525	350	73	98	135	66	16	--02201		--02211				
3.200	150	33 KN	fixed	500	100	120	25	191	20	73	570	380	77	102	195	70	20	--03301		--03311				
5.000	300	52 KN	fixed	600	125	150	30	197	26	100	625	400	79	109	195	72	20	--05201		--05211				
6.300	200	64 KN	fixed	600	125	150	30	214	26	100	675	450	82	112	270	75	25	--06401		--06411				
8.000	550	84 KN	fixed	800	160	190	35	208	33	130	705	450	87	107	300	80	16	--08401		--08411				
10.000	600	104 KN	fixed	900	160	190	35	261	33	130	780	500	87	107	380	80	19	--10401		--10411				
12.500	150	124 KN	fixed	@	160	190	35	@	@	@	@	@	@	@	@	@	23	--12401		--12411				
16.000	700	164 KN	fixed	@	200	240	50	@	@	@	@	@	@	@	@	@	20	--16401		--16411				
20.000	800	204 KN	fixed	@	200	240	50	@	@	@	@	@	@	@	@	@	25	--20401		--20411				
25.000	900	254 KN	fixed	@	200	240	50	@	@	@	@	@	@	@	@	@	25	--25401		--25411				

@ = on request